

tc electronic



**COMBO450
COMBOCLASSIC
COMBOSTACCATO**

MANUAL ADDENDUM

Combo450

Our RH450 bass amp is the talk of the bass-playing world. Now this award-winning bass head plus the variations Classic450 and Staccato, is featured in three ultimate combo models.

Combo450 is a combination of a RS210C cabinet plus either a RH450, a Classic450 or a Staccato amp head. The amp-heads feature a unique tone control section plus TubeTone™, delivering all of the rich characteristics of a full-on tube amp as well as SpectraComp™ offering 'per string' compression for more bite and punch than any other bass amp compressor. Read all about the amps specific features in the models respective manuals and enjoy also the Active Power Management™, delivering maximum power impact. Combining the three heads with the RS210 cabinet, results in three flexible combo amps behaving like tube amps at full blast with unique key features and characteristics, that simply don't exist in any other bass combos.

Other features include auto-sensing PSU that allows you to safely plug in to mains power in any country while on tour, and a Rehearsal Input socket that allows you to plug in a variety of audio sources so you can play along for practice.

The RS210C amp-cabinet is matched with the customized Eminence 2 x 10" drivers and 1" tweeter that deliver the clean, punchy and powerful sound. Once mounted the amp and speakers are housed in an 18mm hard-wearing plywood cabinet with a pull-up handle and wheels for easy transportation.

This manual addendum...

... covers issues that are specific for Combo series.

All other operation instructions can be found in the amps respective manuals.

MOUNTING INSTRUCTIONS


Assembling the amp-head of your choice and the RS210C cabinet is easy. Please follow the instructions below.

In the cabinet package please find:

- 4 mm allen wrench
- One allen screw
- 1-inch rubber-pad
- One paper-templet for placing rubber-pads on amp-head

1 – Place paper-templet on amp as illustrated below

Then remove adhesive paper from the rubber-pad and place it just in front of the arrow on the paper-templete.

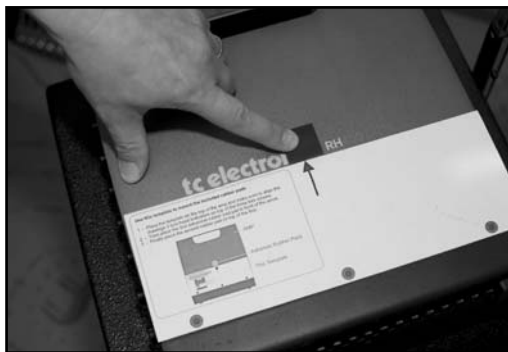

2 – Mount the amp in the cabinet

- Ensure that the amps rubber-feet fit into the slots on the cabinets amp-shelve.




3 – Mount and tighten the screw- without using excessive force



MOUNTING INSTRUCTIONS

4 – Connect the cabinet using the Speakon connector

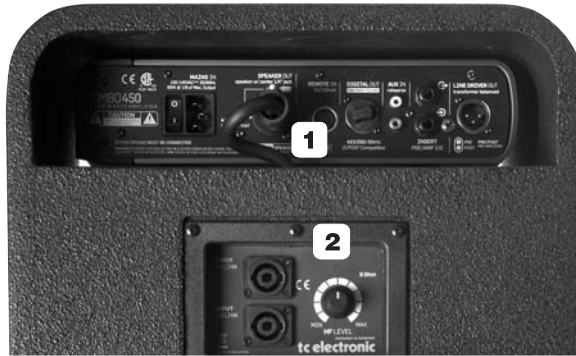

The internal speakers are connected via a Speakon connector as illustrated above. (1)

Up to 2 additional TC Electronic RS cabinets of any type, or one 4 Ohm cabinet of another brand, can be connected via the Speakon connectors on the cabinet. (2)



The RS210C cabinet is connected to the amplifier via the speakon connector (1).

Do NOT simultaneously connect an additional amplifier to the speaker cabinet connectors (2) while (1) is plugged.



How to mount / un-mount the pull-up handle

The pull-up handle with wheels is mounted or unmounted by pressing the release mechanism as illustrated above.



Ensure that the handle is correctly mounted before using it for transportation.

TECHNICAL SPECIFICATIONS - COMBO450

| | |
|---------------------|--|
| Weight: | 22 kg / 48,5 lbs |
| Enclosure: | 18mm plywood side panels, 18mm carved hardwood rounded corners |
| Surface treatment: | 'Anti-skid' dual component surface |
| Porting: | Rear porting |
| Woofers: | Eminence custom 10" |
| Tweeter: | Eminence 33 mm voicecoil, titanium diaphragm |
| Tweeter adjustment: | L-pad (off - 0dB) |

Due to continuous development, these specifications are subject to change without notice.

P/N E60513311

tc electronic®